



APEX GLAZING

ALUMINIUM BIFOLD DOORS

APX FOLD

Fold the wall away.

UW FROM 1.4 W/M²K

PAS24 AVAILABLE

10 YEAR GUARANTEE

QANW



0800 086 9636 · info@apex-glazing.co.uk
Kemp House, City Road London EC1V 2NX

www.apex-glazing.co.uk



ALUMINIUM BIFOLD DOORS

APX FOLD

THE FOLDING DOOR THAT
PUTS THE WHOLE OPENING
AWAY

■ Leaves Up to 1200 x 2500mm

■ 30mm Polyamide Thermal Break

■ PAS24 Security Available


Leaves of up to 1200 x 2500 mm fold back and stack clear of the span, so the room and the garden become one space. A 30 mm polyamide thermal break and foam-insulated profiles hold U-values from 1.4 W/m²K without thickening the frame, keeping sightlines at a slim 122 mm. The standard roller is PAS24 approved, with shoot bolt locking on every leaf.

■ Slim 122mm Sightlines

■ Glazing From 24 to 38mm

■ 10 Year Guarantee

APX FOLD SYSTEM

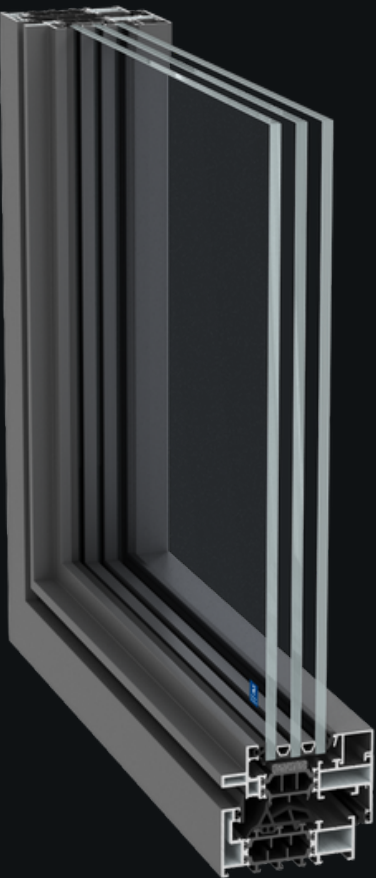

SIZE LIMITS

Max Leaf Width	1200 mm
Max Leaf Height	2500 mm
Typical Sightline	122 mm

SPECIFICATION

Frame Depth	70 to 82 mm
Thermal Break	30 mm Polyamide
Glazing Thickness	24 to 38 mm
Threshold	Low Option
Finishes	Any RAL Colour

PERFORMANCE

U-Value	From 1.4 W/m²K
Energy Rating	Up to A
Certification	Kitemark
Security	PAS24 Available
Guarantee	10 Years