

ALUMINIUM SLIDING DOORS

APX20 ULTRA SLIM

All glass. No interruption.

20MM INTERLOCK

PAS24 AVAILABLE

10 YEAR GUARANTEE



ALUMINIUM SLIDING DOORS

APX20 ULTRA SLIM


A 20MM CENTRAL INTERLOCK THAT KEEPS THE GLASS RUNNING UNINTERRUPTED

- 20mm Flush Central Interlock
- Concealed Perimeter Frame Option
- PAS24 Security Available

Most slim sliding doors measure 20mm head on, then thicken to 45 or 65mm the moment you see them from the side. The APX20 uses an integrated flush interlock that sits level with the sash, so the central junction reads 20mm from every angle, and the perimeter frame can be built into the structure until it disappears into the opening. Upgraded rollers glide sashes of up to 320kg on a fingertip, with a level threshold that lets inside and outside run together.

- Sashes Up to 2500 x 3000mm
- Up to 94% Glass to Frame Ratio
- 10 Year Guarantee

APX20 ULTRA SLIM SYSTEM

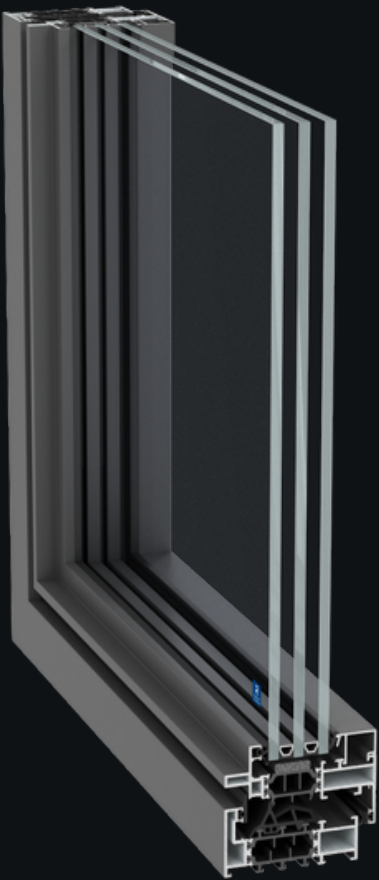

SIZE LIMITS

Max Sash Width	2500 mm
Max Sash Height	3000 mm
Max Sash Weight	320 kg

SPECIFICATION

Frame Depth	116 mm / 182 mm
Sash Depth	37 mm
Glazing Thickness	26 to 30 mm
Thermal Break	16 / 24 mm Polyamide
Finishes	Any RAL Colour

PERFORMANCE

U-Value	From 1.3 W/m²K
Acoustic Rating	Up to 43 dB
Watertightness	Class 7A
Security	PAS24 Available
Guarantee	10 Years